

SORDIN

Pro Line

FM Pro


Ear Muff with built-in FM radio receiver with highest sound quality in stereo. It features the latest technology with automatic station search and battery save function. FM Pro improves working conditions and alleviates feelings of isolation. Allows you to listen to music, sports or news while carrying out your tasks. Both at work and in your spare-time.

- Frequency range 88 – 108 MHz
- All functions operated by distinct push buttons, which are very easy to use.
- Electronic output limited to a maximum of 82dB(A).
- Four volume steps. Memory for last selected volume and station.
- Automatically switches off the electronics if no control buttons are pressed for 4 hours.
- Battery life of 120-140 hours.
- Switches automatically from stereo to mono under poor reception conditions.
- Adjustable headband pressure for individual fit.
- Weight: 262 g (headband), 256 g (helmet mounted)

Headband

Tested according to EN 352-1 at FIOH, Finland (0403)
SNR = 24 dB, H = 30 dB, M = 20 dB, L = 13 dB

Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean value (dB)	12,1	10,7	12,4	21,4	29,5	31,7	40,1	41,7
Stand. dev. (dB)	2,3	1,9	2,9	3,2	3,7	2,8	5,3	4,5
APV-value (dB)	9,8	8,8	9,5	18,2	25,8	28,9	34,8	37,2

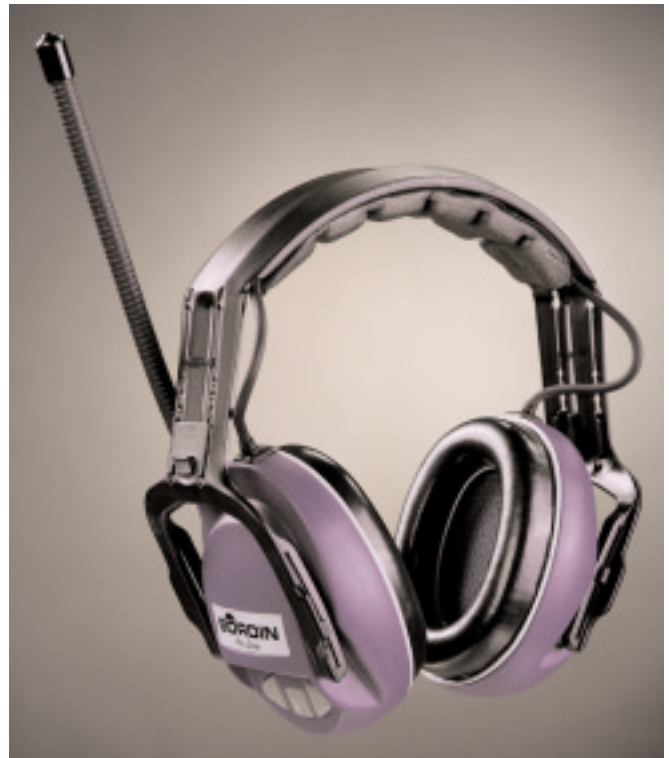

Item No:

Headband	36100
Helmet mounted	36600
Hygiene kit	60084



Helmet mounted

Tested according to EN 352-3 at FIOH, Finland (0403)
NR = 25 dB, H = 30 dB, M = 22 dB, L = 14 dB

Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean value (dB)	12,4	10,1	14,5	23,6	29,8	31,2	37,5	39,4
Stand. dev. (dB)	2,4	2,7	1,9	3,1	2,9	3,6	4,9	2,7
APV-value (dB)	10,0	7,4	12,6	20,5	26,9	27,6	32,6	36,7

Listen to us before it's too late!

Sordin AB, Stigaregatan 7, 791 60 Falun, Sweden
Phone +46 23 699 80, Fax +46 23 210 35, info@sordin.se

SORDIN

www.sordin.com